




**HIGH EFFICIENCY 2MW
GAS TURBINE GENERATOR**

**1,800+ kW
CONTINUOUS
ELECTRICAL POWER*
WITH OPTIONAL
INTEGRATED HEAT
RECOVERY**

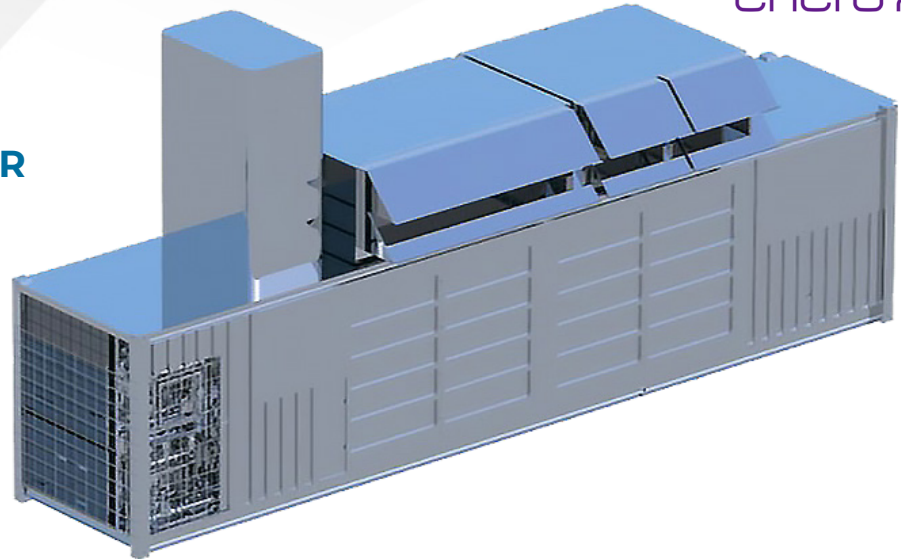


KEY FEATURES

- Speed reduction gearbox
 - Epicyclic with journal bearings
 - Available in 50Hz and 60Hz version (1500/1800 rpm)
 - Equipped with thermocouples on main bearings
- Turbine Rotor Bearings
 - Cold side of the engine
 - Thrust (tilting pad) and journal
- Compressor wheel
 - Centrifugal single stage
- Turbine wheel
 - Radial inflow single stage
- Combustors
 - Dry Low Emission

ELECTRICAL PERFORMANCE

CHARACTERISTIC	SPECIFICATION
Electrical efficiency	23.4%
Electrical power	1,877 kW

*ISO Conditions on high pressure natural gas

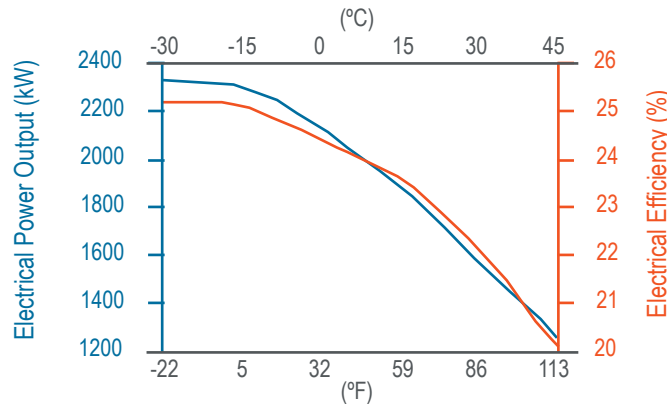

Rugged Gas Turbine

- Wide Acceptable gas range; ~800 Btu/scf to ~2300 Btu/scf (~29.7 MJ/Sm³ to 86.2 MJ/Sm³)
- H₂S tolerance up to 1.5% by weight
- Can burn up to 5% hydrogen (100% expected by 2025)

Control System

- Woodward Flex 500 PLC-Based Turbine Control Panel (TCP)
- MCC, main circuit breaker, communication link to ICCS/DCS optional

Complete Turbine Package

- On board control system
- Air intake filtration
- Exhaust with silencer
- Fuel system
- Ventilation system
- CO₂ fire suppression system

Combined Heat and Power with HRSG or Absorption Chiller

- High Efficiency CHP: Up to 85%
- Steam output 14,500 lbs/hr at 145 psig (6.6 metric t/h at 10 barg)
- Chiller output 1800 TR (6.3 MW)

Voltage

400 V – 13.8 kV

Frequency

60 Hz / 50 Hz

Compressor Pressure Ratio

7:1

Air Inlet Mass Flow

20.4 lb/sec (9.26 kg/s)

Available Exhaust Heat

17.8 MMBtu/hr (5,221 kW)

Exhaust Gas Temperature

1112° F (600° C)

Coupling

Flexible dry coupling with integrated shear pin for overload protection

Starter System

Hydraulic starter with electric motor and high-pressure pump

Lubrication Oil System

- Turbine Driven
- Oil cooler and filtration included

Synchronous Generator

- 4 pole, 480 or 400 V standard
- Available up to 13 kV

AMBIENT TEMPERATURE LIMIT

CHARACTERISTIC	SPECIFICATION
Standard	4° F to 113°F (-20°C to 45°C)
Extreme Temperature Conditions*	— Option 1: Below -4° F (-20° C) — Option 2: Above 113° F (45° C)

*Includes control system cabinet.

EMISSIONS - ISO CONDITIONS

ppm @ 15% O ₂ Dry Exhaust	Natural Gas Fuel		
	Load	70%	<70%
NOx	≤10	50	50
CO	≤10	50*/600	1500

* May use compressor bleed to achieve this level of CO emission

ISO Condition

LHV:	935 Btu/scf (35.0 MJSm ³) (Natural Gas Fuel)
Altitude:	sea level
Ambient Temperature:	59° F (15° C)
Barometric Pressure:	14.696 psi (1.012 bar)
Relative Humidity:	60%

PACKAGED UNIT PHYSICAL SPECIFICATIONS

DIMENSION	WIDTH	LENGTH	HEIGHT	WEIGHT
Metric	2.44 m	12.19 m	6.05 m	26,500 kg
Imperial	8 ft - 0 in	40 ft - 0 in	19 ft - 10 in	58,400 lbs

SOUND LEVELS


CHARACTERISTIC	SPECIFICATION
Standard	85 dB(A) @ 1 m

APPLICABILITY

- Wide range of applications already proven through existing installed base both on- and off-shore.
- Transforms associated flare and waste gases and tank vapors from oil and gas operations into a continuous source of clean electric power.
- Converts biogases from landfills, wastewater treatment plants, and digesters into useful power and heat for use on site.
- Eliminates need for diesel transport, simultaneously cuts added emissions from typical diesel- or gas-powered reciprocating engine turbines.


PERFORMANCE - EXHAUST

ISO Condition (Imperial)

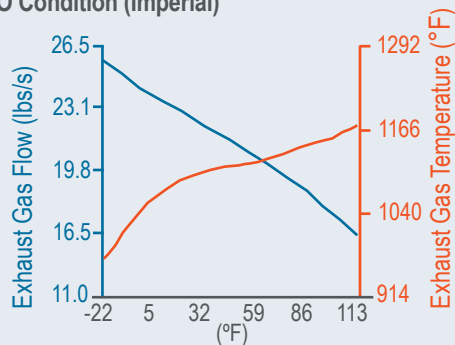


PERFORMANCE - EXHAUST

ISO Condition (Metric)

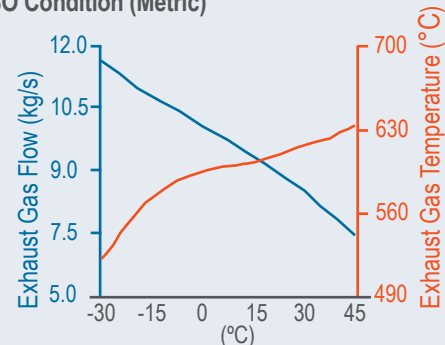


PERFORMANCE - HEAT RATE

ISO Condition (Imperial)

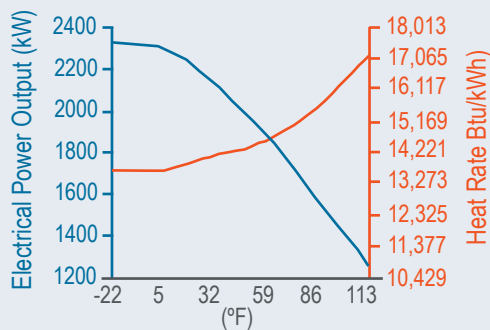

PERFORMANCE - HEAT RATE

ISO Condition (Metric)

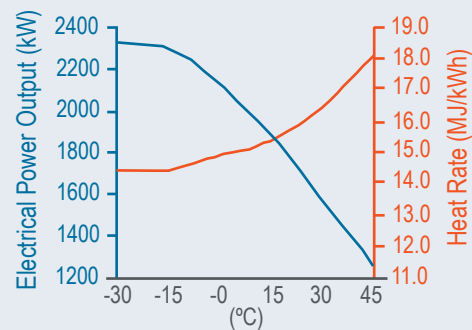

©2022 Flex Leasing Power and Service, LLC and/or its affiliates ("FlexEnergy Solutions"). This document comprises a general overview of the products or services described herein. It is solely for informational purposes, does not represent a warranty of the information contained herein and is not to be construed as an offer to sell or solicitation to buy. Contact FlexEnergy Solutions for detailed product, design, and engineering information suitable to your specific applications. FlexEnergy Solutions reserves the right to modify its products and related product information at any time without prior notice.